



PRINCELUMBER.COM

Prince Lumber's commitment to provide quality materials and excellent customer service has made us a trusted partner for builders and contractors since 1923. Now, we are excited to announce that we recently joined with TSG – Trade Supply Group – to supply our customers with a wider array of products and innovative materials, as well as more staff to assist in ordering and estimation.

Under the TSG umbrella, Prince Lumber is opening a new facility in Long Island City, and will have a broader network of resources, expertise, and industry connections. TSG's support will allow Prince Lumber to optimize its operations, make deliveries faster, and enhance our customer service.

Working in NYC requires innovation and attention to the smallest of details. Joining the TSG family will give Prince a fresh perspective and modern approach to fulfilling and anticipating what the construction industry needs and demands. Prince Lumber and Prince Hardware will remain trusted partners for contractors, businesses and homeowners who want to achieve excellence and satisfaction.

We strive to treat all customers like royalty. Comments, queries, and compliments are always welcome. Please visit us on the web at: www.princelumber.com. Thank you for shopping at Prince Lumber and Prince Hardware.





TABLE of CONTENTS

MOULDINGS

Astragals & Mullion Cente	er	S	. 51
Back Bands			36
Bases	111	₿ 7 -	-44
Base Caps	4	6.	-48
Base Shoes			69
Bed Mouldings			23
Brick Moulding			.67
Caps			66
Casings	2	6	-32
Chair Rails	5	2	-54
Corner Guards			65
Coves			24
Crowns		10	-18
Crown Inspiration		. (5-9
Dentil Mouldings			. 19
Drip Caps			.67
Edge Mouldings			.57
Floor Moulding			69
Glass Beads			69
Half Rounds			60
Hand Rails			58
Lattices			62
Nose & Coves			50
Oak Landing Tread			68

Oak Hearth Border67
Oak Saddles70
Panel Mouldings 55
Parting Strip 69
Picture Frame 56
Picture Moulding57
Quarter Rounds 59
Raised Panel Caps 56
Rounds/Poles61
Select S4S71
Skew Backs (Chamfers) 69
Solid Crowns 20-22
Stepping 68
Stool 68
Stops63-64
Wainscoting 68
Wainscoting Inspiration5

BUILDING PRODUCTS

Acoustical Ceiling Accessories	92
Bending Plywood	93
Doors72-8	30
Door Jambs 90-	91
Sub-Floor and Concrete . 81-8	34
Soundproofing	39


























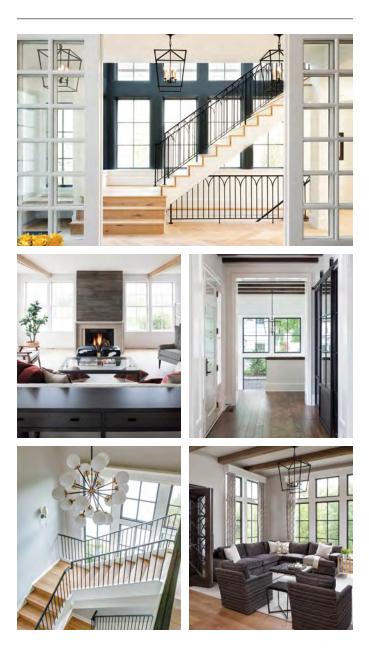

ASK ABOUT OUR EIGHT STORY BOOM SERVICE



FASSI

618 West 47th St New York NY 10036

GVW 80,000

WAINSCOTING ANSPIRATION



CROWN ANSPIRATION



16CRW8 & 43BB7 Combination



17CRW9, 22SC6 & 5/4 x 4 Combination



17CRW10 & 38B1 Combination



11CRW4 & 43BB7 Combination

CROWN ANSPIRATION

32MCC312 15MCOV6

32MCC312, 15MCOV6




12MCR514 Ceiling Step





12MCR514, 32MCC312



12MCR514 Wall Step

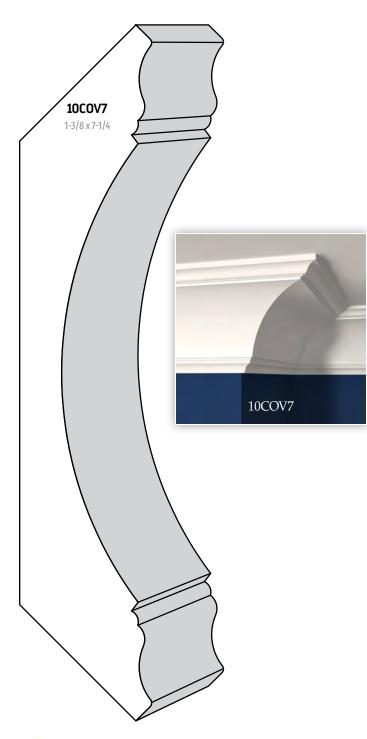


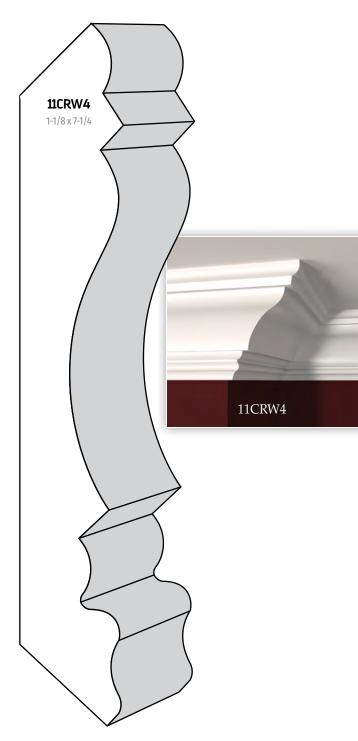


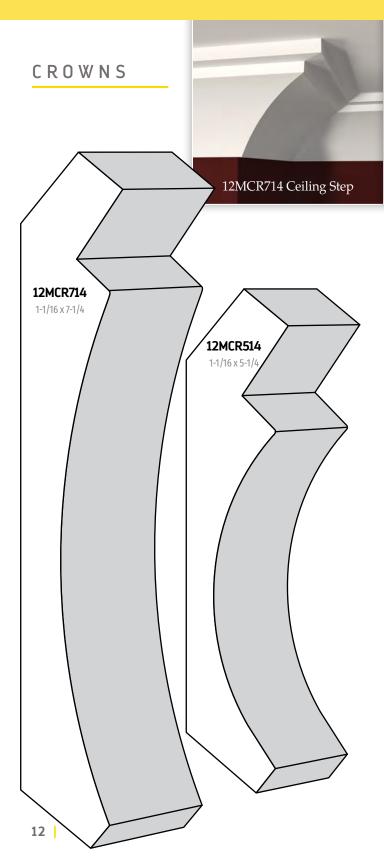


13MCR650 Wall Step


13MCR550 Ceiling Step

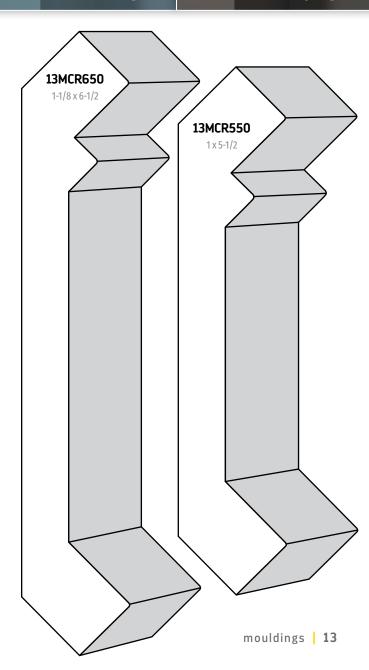

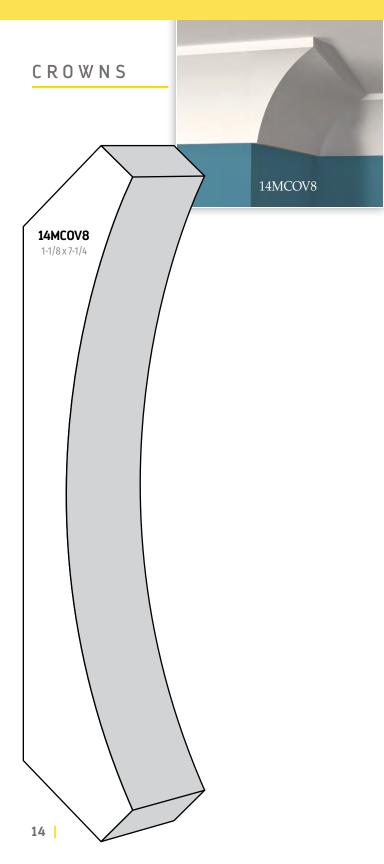


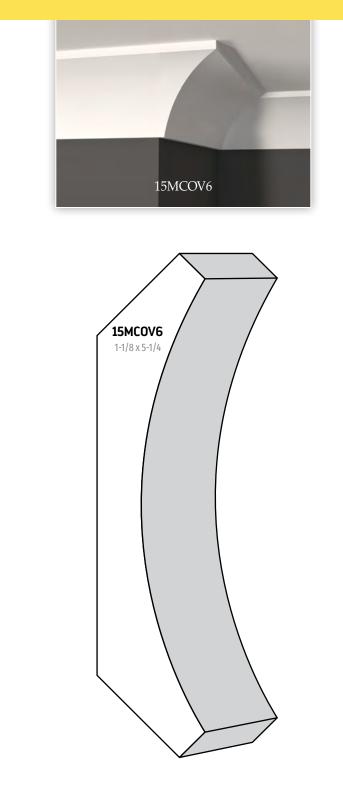


CROWNS

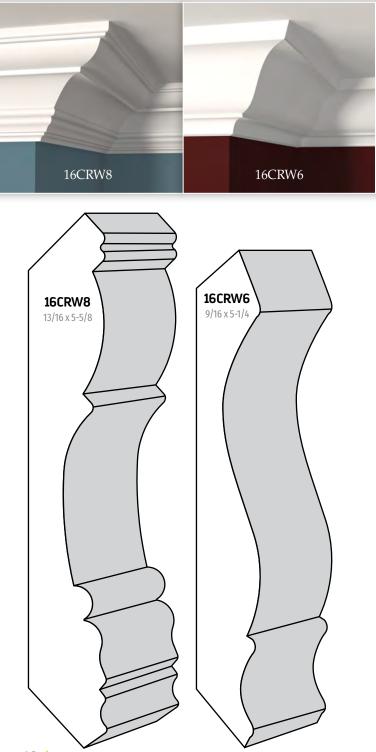




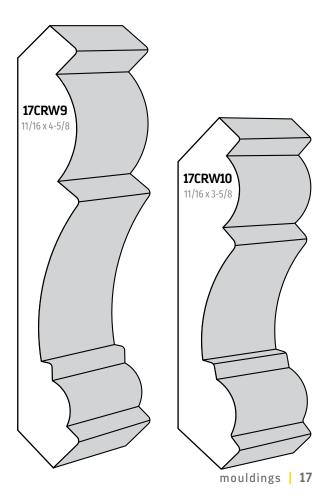

CROWNS

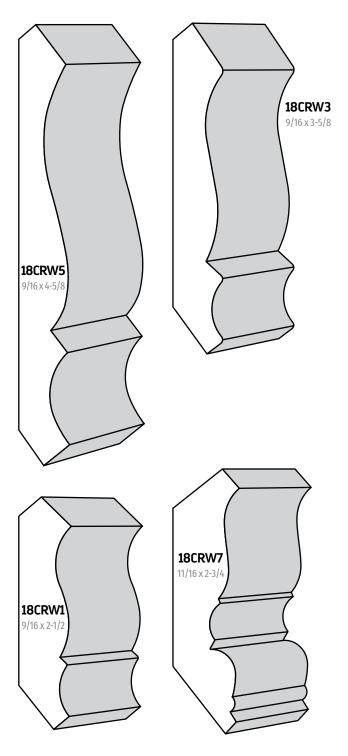


DENTIL MOULDINGS

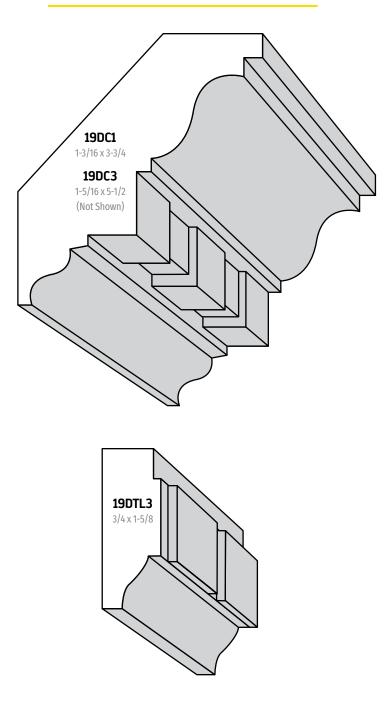




SOLID CROWNS

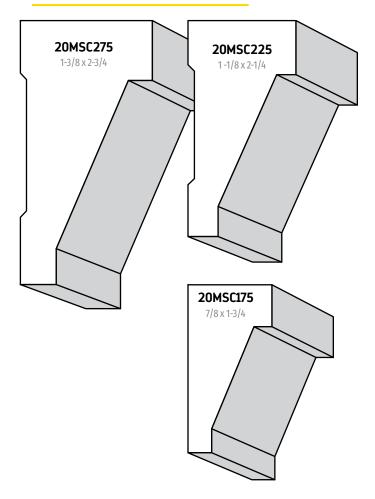





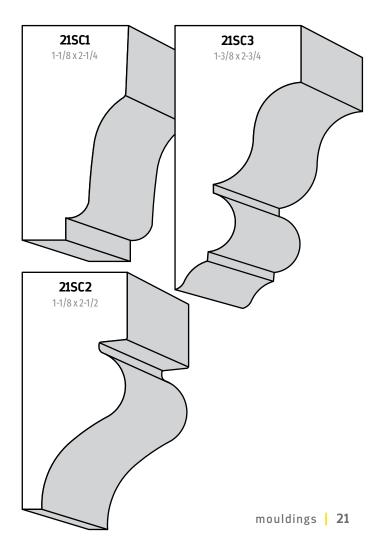



SOLID CROWNS

























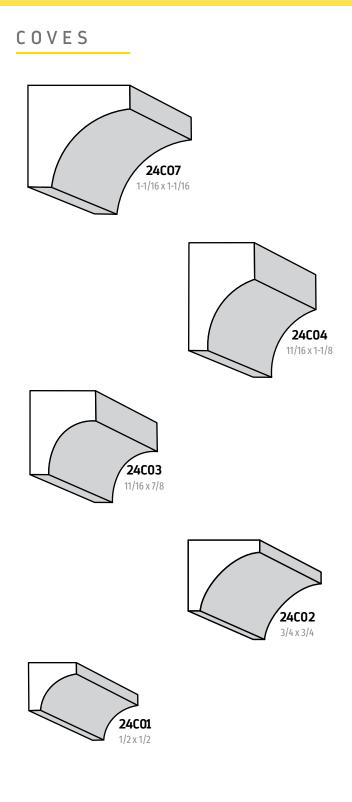


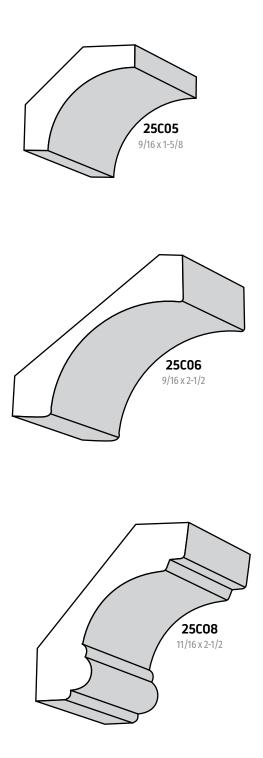







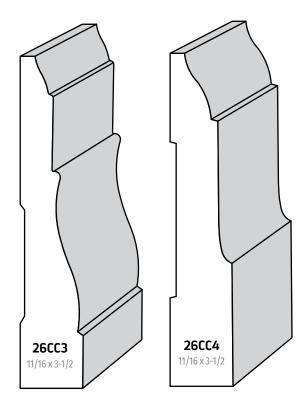

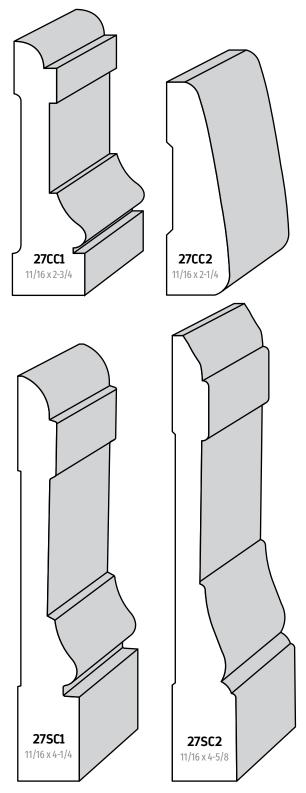





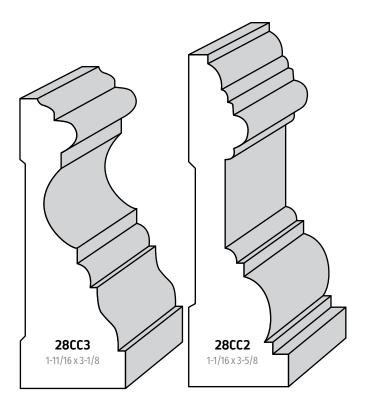

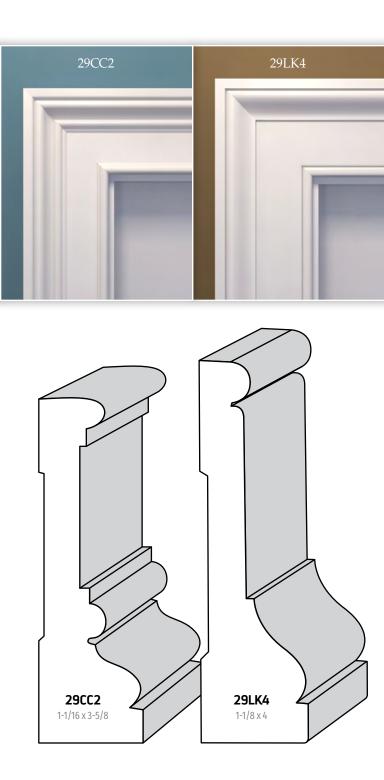




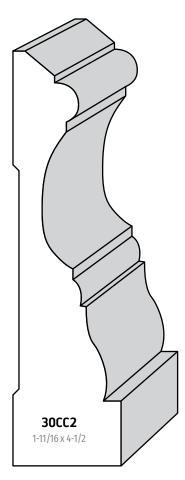


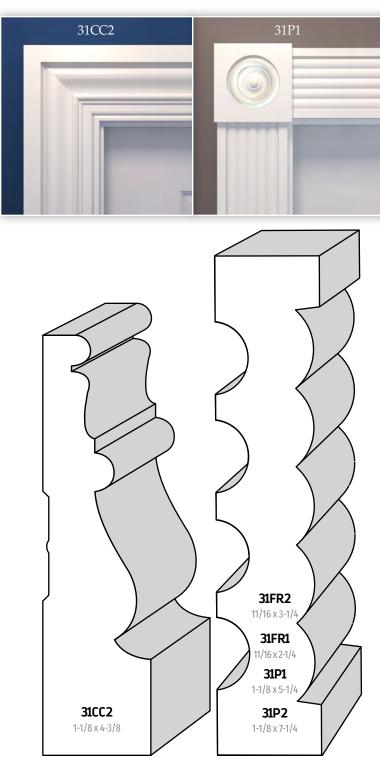


32MCC412 – Edge Outside	32MCC412 – Edge Inside

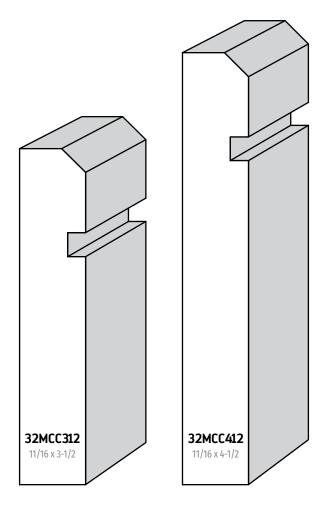




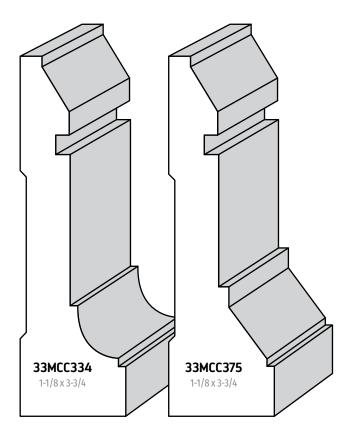




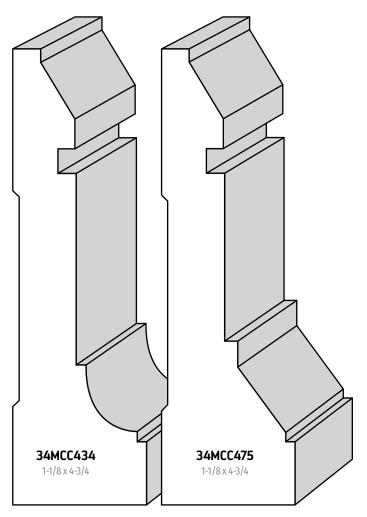




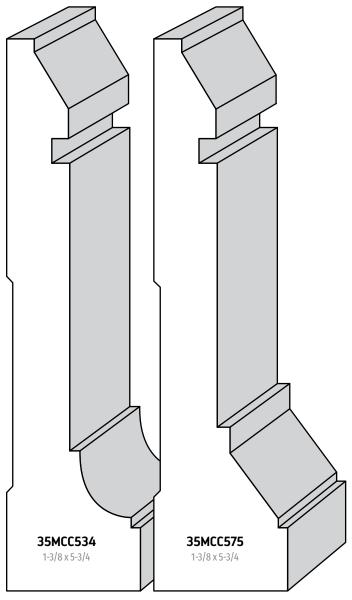


BACK BANDS

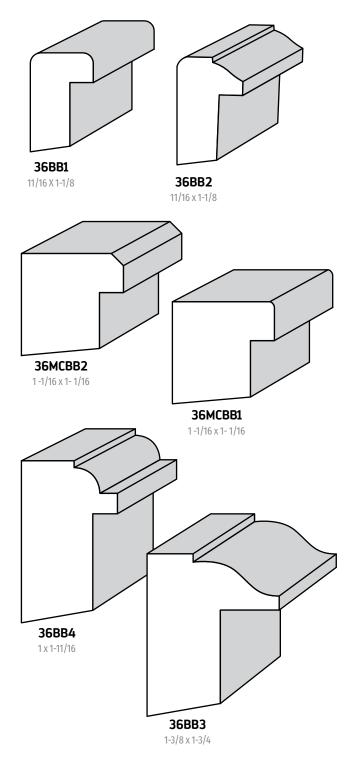


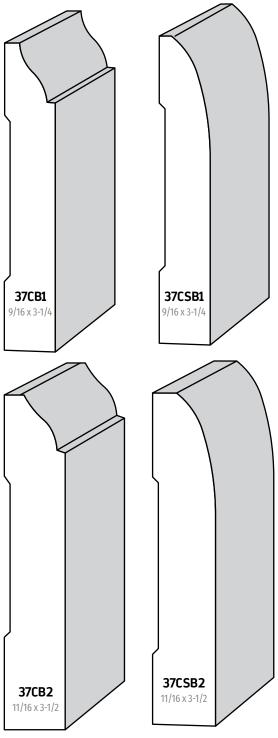






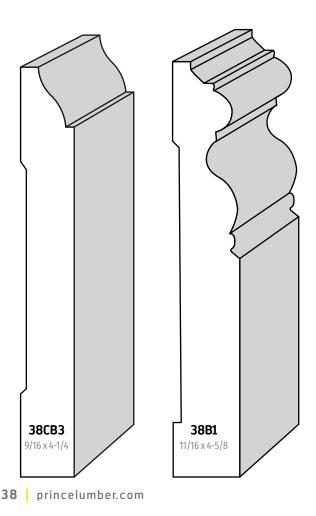

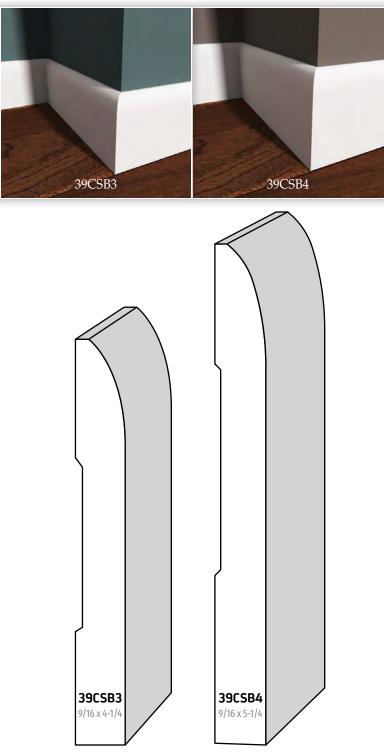

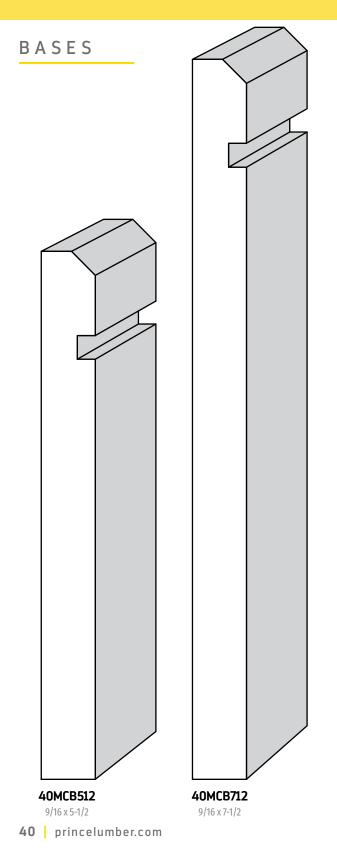



40MCB512 Base, 46MCS1 Shoe




Casing: 32MCC412, Base: 40MCB712





43BB7 Base & 69SH1 Shoe





43BB7 Base

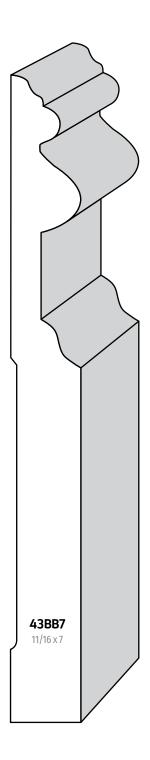


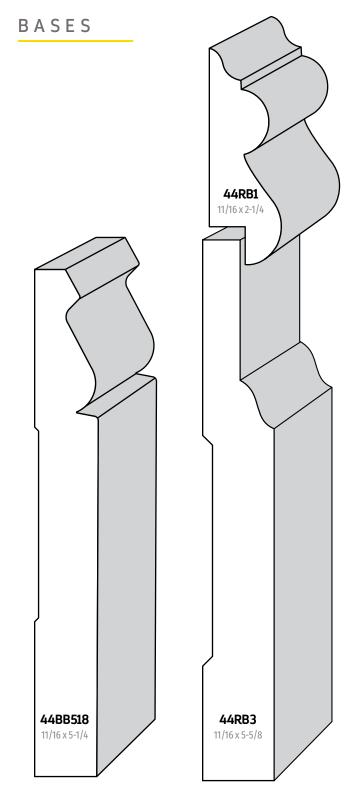









3/4 x 1-1/16


5/8x1




46MCS1 Base Cap, 1" x 6", 46MCS1 Shoe Moulding



46MCAP2 Cap, 1" x 6", 46MCS1 Shoe Moulding





47MCAP34 5/8 x 1-3/4




47MCAP1 Cap, 1" x 8", 46MCS1 Shoe Moulding





47MCAP34 Cap, 1" x 6", 46MCS1 Shoe Moulding


BASE CAPS














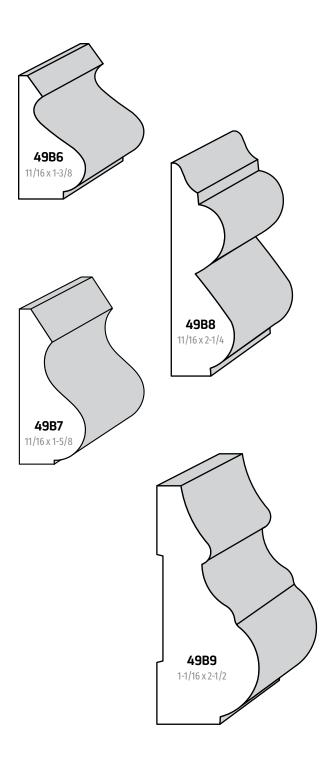



NOSE & COVES

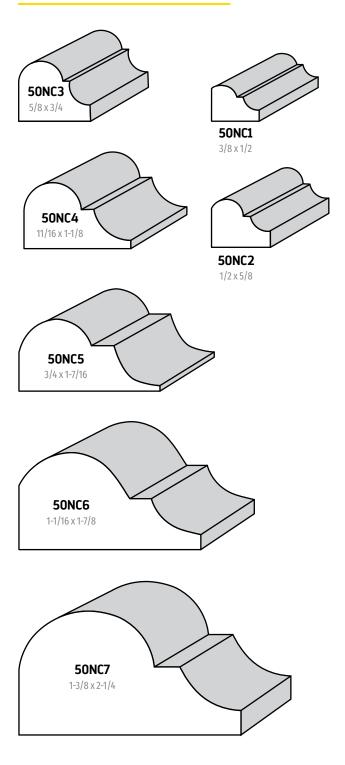

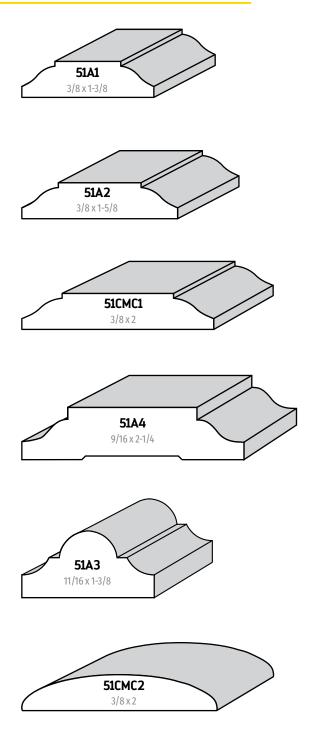


CHAIR RAILS

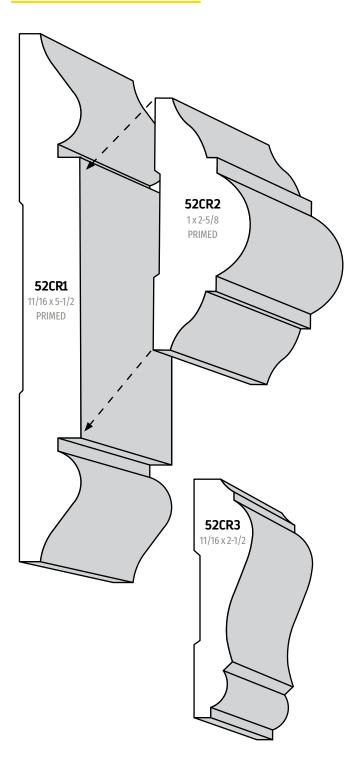





CHAIR RAILS

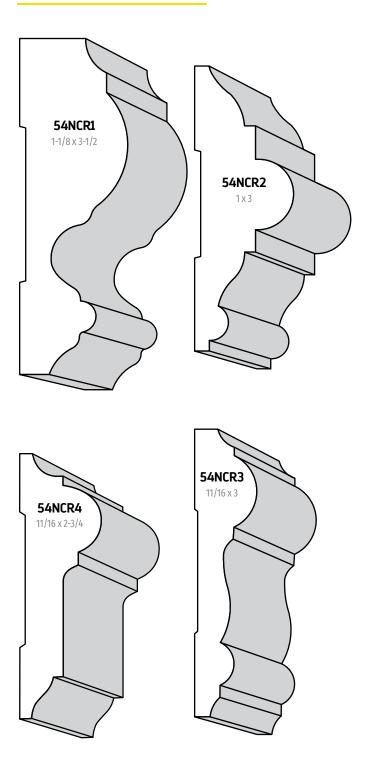


PANEL MOULDINGS






3/8 x 1-1/8






55PA6 11/16 x2




PICTURE FRAME




RAISED PANEL CAPS







PICTURE MOULDINGS

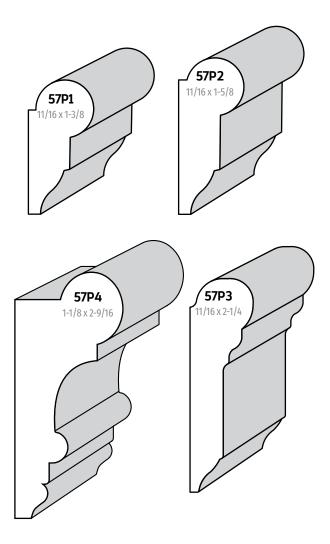



EDGE MOULDINGS



HAND RAILS

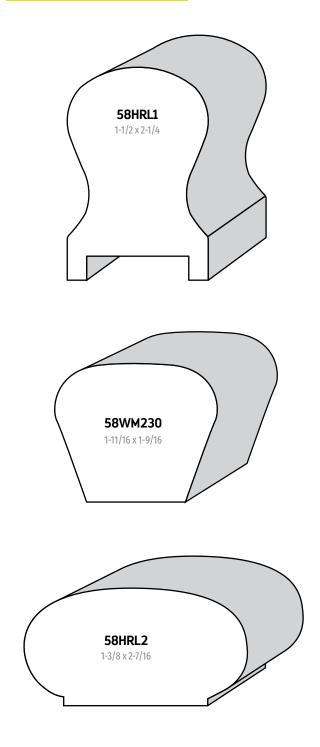

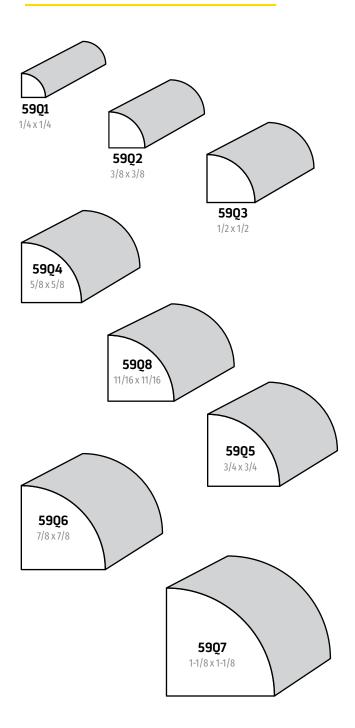


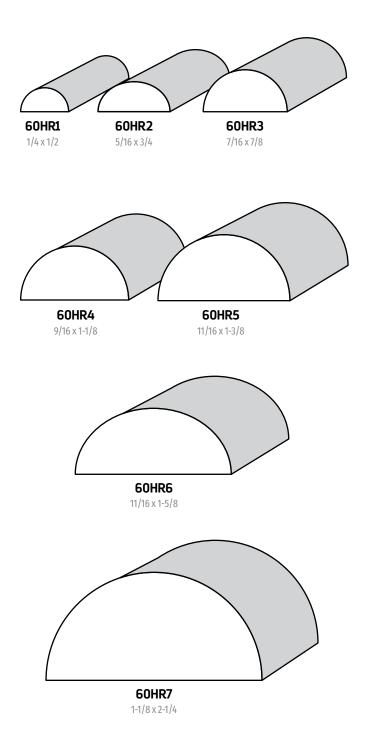



ROUNDS/POLES



LATTICES

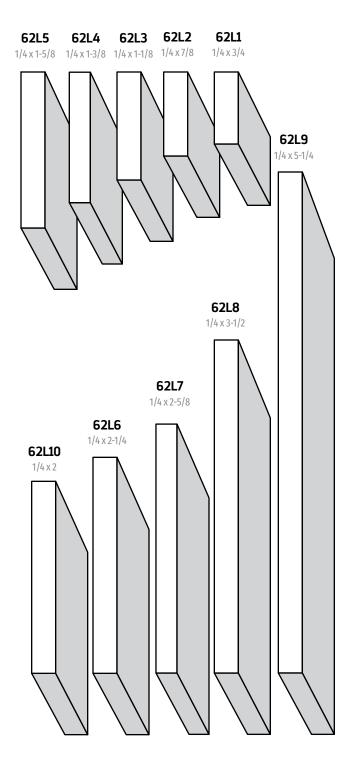

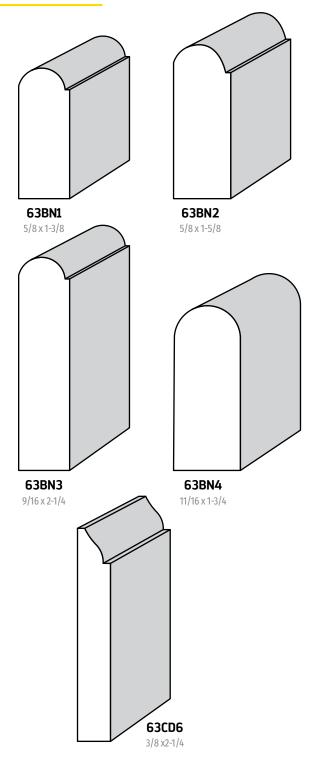


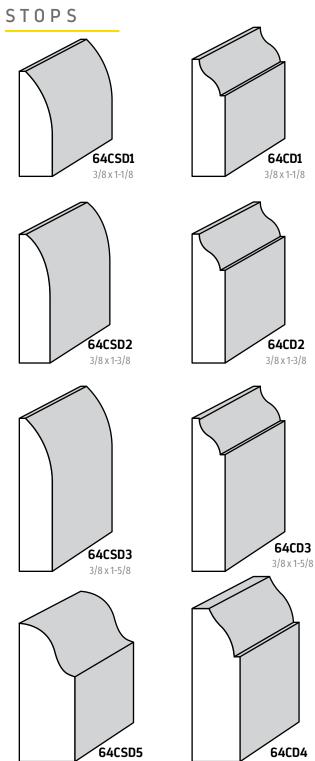


9/16 x 1-1/2

1/2 x 1-5/8


CORNER GUARDS

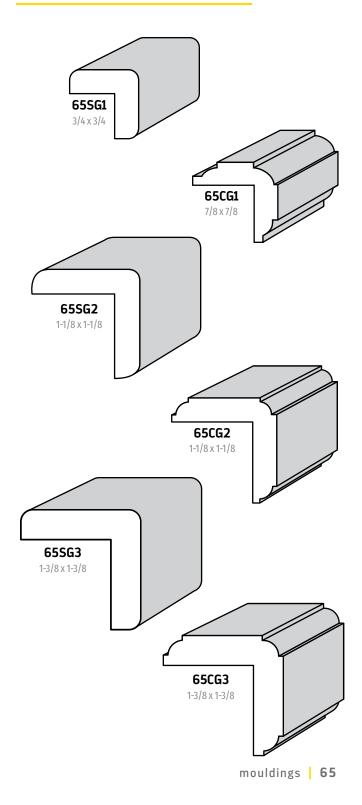


CAPS - SANITARY

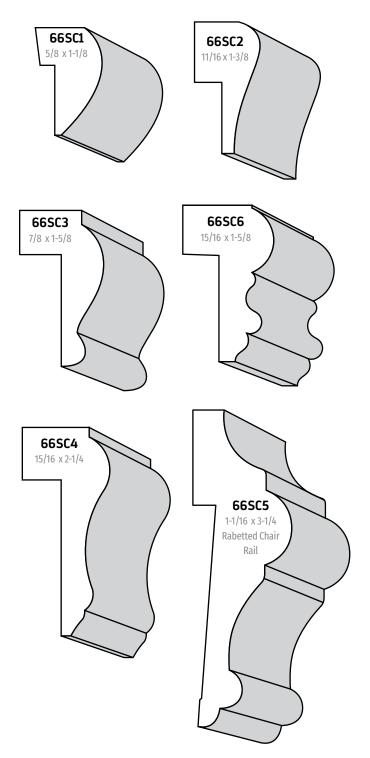


DRIP CAPS




BRICK MOULDING




OAK HEARTH BORDER



WAINSCOTING





STEPPING





ALSO AVAILABLE OAK TREADS: 36" x 42" x 48" AND LONGER LENGTHS

STOOL

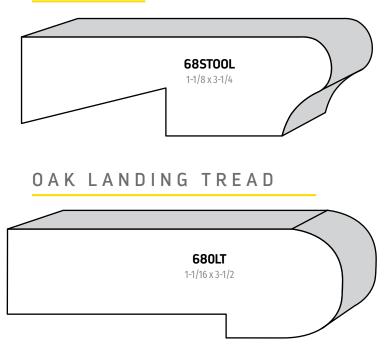

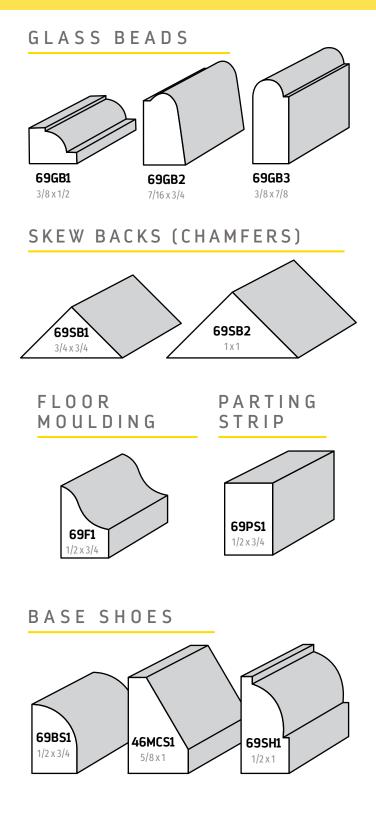

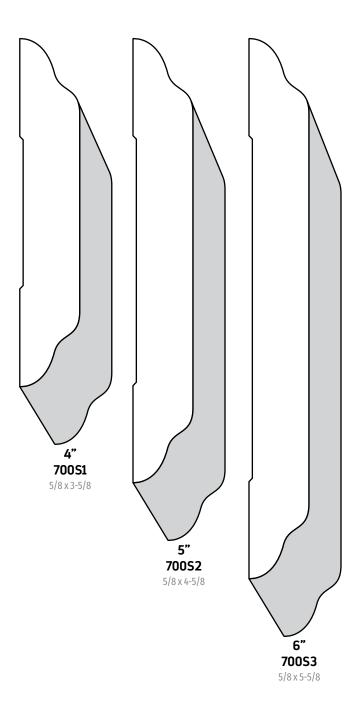

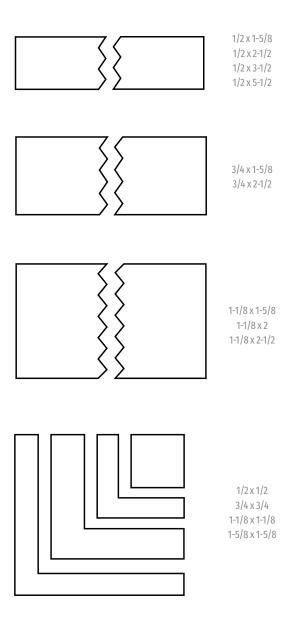





TruStile (TS) series doors feature architecturally-correct panel door styles from 1- to 9-panel configurations. Each door is built with genuine stile and rail construction and is never stamped or routed. Our flexible manufacturing process also allows you to customize the look of any TS series door by substituting any panel for glass, resin, leather or metal.








Popular TS Series Door Styles

The complete TS series features over 120 standard door styles

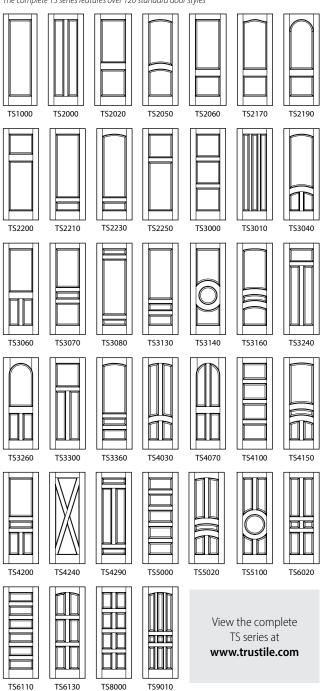



Panel Door Sticking & Moulding Options



Bevel (BV) Sticking



Quarter Bead (QB) Sticking



Cove & Bead (CB) Sticking



Quarter Round (QR) Sticking



Roman Ogee (OG) Sticking



Traditional (TR) Sticking



Square Stick (SS) Sticking



One Step (OS) Sticking




Quirk (QM) Moulding




Bolection (BM) Moulding



Big Bolection (BB) Moulding Miracle (MR) Moulding



Avant (AV) Moulding



Linea (LN) Moulding

Panel Door Panel Options



Raised (A) Panel



Double Hip (D) Panel



Scoop (B) Panel



Senior Raised (E) Panel



Flat (C) Panel



Senior Bevel (F) Panel



Material Options

TruStile has the material options to fit your unique architectural and personal style. With premium MDF, stain-grade wood, and a wide selection of glass, resin, leather and metal options, TruStile is your one-stop provider of premium doors for every application.

MDF & Wood

Select MDF for painted applications or choose from 20 wood species.



Red Oak


Select Alder

Walnut

White Oak

Decorative Glass & Resin

TruStile maintains a large selection of on-trend designs.



Reeded

Capiz

Ginkgo Thatch

Ting Ting

Leather & Metal Accents

Create a look that is uniquely yours.



Shagreen Caviar

Wagon Lit Navy

Patina Canterbury

Patina Monet





TruStile's Tru&Modern (TM) Door Collection consists of over 100 contemporary door styles. With clean, strong lines and bold accents, this collection radically alters the concept of what a door can bring to today's modern and contemporary interiors.






DRIVEN

Popular TM Series Door Styles

The complete Tru&Modern Collection features over 100 standard door styles

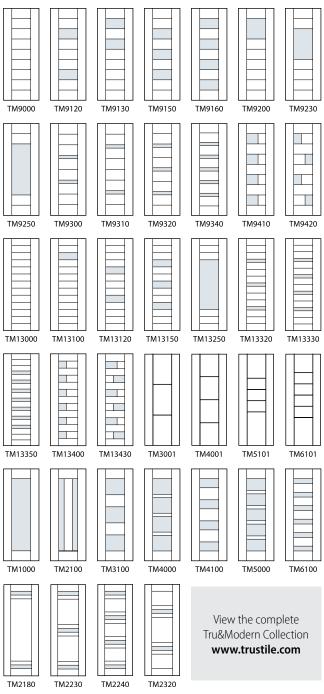



Other Modern Doors Styles

The perfect complement to today's demand for clean, sophisticated simplicity.



Infinite Rail (TMIR) Series



Tru&Modern Flush Doors



Tru&Modern Plank Doors



Other Panel & Glass Doors Styles From traditional to transitional, TruStile has a door to match your architectural style.





French Lite (FL) Series




mouldings 79

How to Determine the Swing of an **EXTERIOR** Door Unit

Right Hand Swing In

Left Hand Swing In



Right Hand Swing Out

Left Hand Swing Out





Prince Lumber is proud to stock LATICRETE's globally proven, high-performance solutions including their 9235 Waterproofing Membrane, Hydro Ban, 254 Platinum, and 254R Platinum Rapid products. Call us at 212-924-3262 for product availability and visit www.laticrete.com for more information.

9235 WATERPROOFING MEMBRANE

A thin, load-bearing waterproofing designed specifically for the special requirements of ceramic tile, stone and brick installations. A self-curing liquid rubber polymer and a reinforcing fabric are quickly applied to form a flexible, seamless waterproofing membrane that bonds to a wide variety of substrates.

FEATURES/BENEFITS:

- Industry approved as a shower pan liner
- Provides anti-fracture protection up to 1/8" (3 mm)
- Can be installed using a paint roller or brush
- Meets LEED and VOC requirements
- Interior and exterior

HYDRO BAN®

A thin waterproofing anti-fracture membrane that combines optimum performance and unmatched productivity. HYDRO BAN® is rapid drying allowing for a faster tiling time and flood testing in just 2 hours after final cure. Save yourself time and money, and complete your installations faster with greater ease.

FEATURES/BENEFITS:

- Flood test in 2 hours
- Bonds directly to metal and plastic plumbing fixtures
- No fabric required
- Anti-fracture protection up to 1/8" (3 mm)
- IAPMO and ICC approved



235 WATERPROOFING MEMBRAN



APPROXIMATE COVERAGE Per Commercial Unit: 250 ft² (23.2 m²) Per Mini Unit: 50 ft² (4.7 m²)



254 PLATINUM

Premium one-step, polymer-fortified, thin-set mortar that provides unsurpassed strength and versatility. Ideal for interior, exterior, thin porcelain tile and thin porcelain tile panels, and submerged applications on virtually all substrates and applications. For interior and exterior use.

FEATURES/BENEFITS:

- Ideal for gauged (thin) porcelain tile panels
- Exceptional bond strength
 Superior for exterior and
- submerged applications
- Great for difficult-to-bond porcelain tiles, glass mosaics, large format glass, and large, thin porcelain tile
- Easy to trowel; assures proper coverage on both the substrate and the veneer
- Long open time, allowing flexibility on the jobsite
- Exceeds ANSI A118.15 and ANSI A118.11 requirements
- Meets ISO 13007-1 C2TES1P1 classification

254R PLATINUM RAPID

One-step, polymer-fortified, thin-set mortar for applications requiring rapid setting. Excellent for exterior applications that require rapid setting, 254R has unsurpassed adhesion and workability.

FEATURES/BENEFITS:

- Strong adhesion to exterior glue plywood (interior use only), concrete and porcelain tiles
- Mix with water only
- Can be grouted in 2 to 4 hours
- Superior adhesion for submerged applications
- Exceeds ANSI A118.4 requirements and ANSI A118.11



NOTCH TROWEL & COVERAGE

1/4" x 1/4" (6 x 6 mm): 40 – 47 ft² (3.7 – 4.4 m²) 1/4" x 3/8" (6 x 9 mm): 25 – 30 ft² (2.3 – 2.8 m²) 1/2" x 1/2" (12 x 12 mm): 20 – 23 ft² (1.9 – 2.1 m²)



APPROXIMATE COVERAGE

- 80 95 ft² /50 lb bag (7.4 8.8 m²/22.7 kg bag) with 1/4" x 1/4" (6 x 6 mm) notched trowel.
- 60 70 ft²/ 50 lb bag (5.6 6.5 m²/22.7 kg bag) with 1/4" x 3/8" (6 x 9 mm) notched trowel.
- $35-40 \text{ ft}^2/50 \text{ lb}$ bag ($3.2-3.7 \text{ m}^2/22.7 \text{ kg}$ bag) with 1/2" x 1/2" ($12 \times 12 \text{ mm}$) notched trowel.



A COMPLETE LINE SUB-FLOOR AND CONCRETE RESTORATION PRODUCTS

SELF LEVELING UNDERLAYMENTS

LOCK DOWN

LockDown is a versatile,100% solids, epoxy resin system that can be used as a vapor suppression, broadcast priming and crack repair. LockDown is designed for use over existing concrete where the level of moisture emissions from the slab exceeds the maximum allowed by the manufacturer of the finished floor covering.

Compressive Strength (28 Day): Approximate Coverage:

Working Time: Accepts Flooring: 5550 psi 200-400 ft² depending on substrate 20 Minutes 4 hours

LF-210

LF-210 is an economical, cement based, self leveling floor underlayment that is used to create a level, flat and durable surface prior to the installation of finished floor coverings. It as an excellent choice for resurfacing ceramic tile and concrete substrates.

Compressive Strength (28 Day): Approximate Coverage: Application Depths: Working Time: Accepts Flooring: Walkable: 5500 psi 50 ft² @ 1/8" depth Feather to 5" 30+ Minutes Within 24 hours 2 - 3 hours

LEVEL-1

Level-1 is a cement based, interior, self leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its extended working time, low shrinkage and superior leveling properties make it the ideal product for renovation and new construction projects where next day flooring installations are not critical.

Compressive Strength (28 Day): Approximate Coverage: Minimum Application Depth: Working Time: Accepts Flooring: Walkable: 5000 psi 50 ft² @ 1/8" depth 1/4" 20+ Minutes 24 - 48 hours 2 - 3 hours

ECONOMICAL GRADE

FRSATILE



A COMPLETE LINE SUB-FLOOR AND CONCRETE RESTORATION PRODUCTS

SKIM-COATS AND PATCHES

RAMPSTAR

RampStar is an interior, quick setting underlayment with excellent workability that makes screeding, ramping or patching fast and easy. RampStar can be used over concrete, terrazzo, ceramic or quarry tile, epoxy coatings, non-water soluble adhesive residue and approved wood subfloors.

WORKING

CRETE RESURFACER

Compressive Strength (28 Day): Approximate Coverage: Application Depths: Working Time: Accepts Flooring: Walkable: * Up to 5" in limited areas

6000 psi 50 ft² @ 1/8" depth Feather to 2"* 30 Minutes 60 Minutes 1-2 hours

PREPSTAR

PrepStar allows for the installation of many floor coverings in as little as 15 minutes. It can be applied over properly prepared concrete, wood, cement based terrazzo, VCT, ceramic, quarry tile, cutback and non-water soluble adhesive residue, all without priming or the use of an additive.

Approximate Coverage: Application Depths: Working Time: Accepts Flooring: 33 ft² @ 1/8" depth Feather to 1/2" 20 Minutes 30 Minutes


EXTERIOR RESTORATION

CR-90 CONCRETE RESURFACER

CR-90 is a high performance, quick turnaround, concrete resurfacer that when mixed only with water "Makes Old Concrete Look Brand New". CR-90 applications are a cost effective durable answer to expensive concrete replacement. CR-90 is available in white and concrete grey.

Compressive Strength (28 Day): Approximate Coverage (50 lbs): Application Depths: Working Time: Accepts Topical Treatments: Walkable: Accepts Rubber Wheel Traffic: 5000 psi 50 ft² @ 1/8" depth 0" to 1/2" 30+ Minutes Within 24 hours 1 - 2 hours Within 8 hours


SOUNDPROOFING

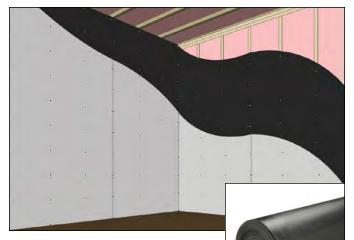

SOUNDPROOF BARRIER Walls & Ceilings

Simple effective product for wall and ceilings; Staple to studs and drywall right over.

Roll Size: 100 sqft 1/8" or 1/4"



GREEN GLUE Walls, Ceilings & Floors

Green Glue will block noise in any existing or new project. Used between 2 sheets drywall, plywood or MDF.

Available: 29 oz. Tubes, 5 Gallon Pail

SOUNDPROOFING




ULTIMATE UNDERLAY Premium Floor Soundproofing


Use to float sub floors and wood, tile or carpet. 93% Recycled content for GREEN BUILDING. Heavy enough to block noise and footsteps.

Roll Size: 100 sqft 1/8"-3mm, 1/4"-5mm, 3/8"-10mm, 1/2"-12mm, and 5/8"-15mm






Floated Wood Floor



Double Plywood Floated Floor


SOUNDPROOFING



RESILMOUNT CLIPS Walls & Ceilings

Resilmount soundproofing clips work with standard drywall and drywall channel. 2X the performance of resilient channel or "quiet" sheetrock.

More performance at a lower installed cost than any other option.

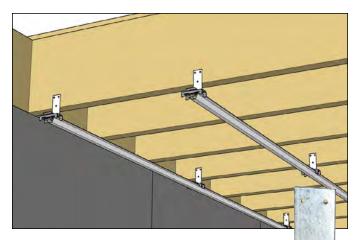

RESILMOUNT A96R Ceilings

Added angle bracket allows 4" drop for Piping, and leveling of uneven joist. Ideal for low ceilings where minimal height is available. **RESILIENT SOUND ISOLATION CLIPS**

The Sound of Silence

RSIC-1

For Wall & Floor Ceiling Assemblies



The RSIC-1 is designed for use with any wood, steel or concrete application where noise control is required. This includes wood framed, steel framed, CMU, or concrete wall and or ceiling systems. The RSIC-1 assembly decouples the gypsum board from the structure, giving the assembly enhanced acoustical performance.

RSIC-DC04


Resilient Sound Isolation DeCouple Clip

The RSIC-DC04[™] is a very versatile clip. The most common use is the decoupling of wall systems. Possible uses include:

- Dropped Ceiling
- Garage door motor isolation
- Decoupled connector for isolating walls built with another wall
- Projector Isolators
- Speaker Isolators
- Vent Fan Isolators
- Electrical box or ceiling fan isolators

RSIC-1.5CRC

Resilient Sound Isolation Clip for 1½" Cold Rolled Channel



The RSIC-1.5CRC[™] is designed for use with any joist or concrete application where a dropped drywall ceiling is required. This assembly decouples the Gypsum Board from the floor structure above, giving the assembly enhanced acoustical performance, while allowing for a chase to hide mechanical ducting and plumbing lines.

RSIC-1EXT04

Resilient Sound Isolation Clip for Ceiling Assembly



The RSIC-EXT04[™] is designed for use where an additional drop for HVAC, Plumbing, or Electrical Chases is needed. This clip gives you the flexibility to drop a ceiling as much as 4" from its original height. The RSIC-1 EXT04[™] is also used to level out uneven floor joists. It creates a dropped ceiling, allowing an open chase for the new wires, all while retaining the superior acoustical performance of the RSIC clips.



As manufacturers of the world renowned EzyJamb[®] door jamb systems, the EZ Concept range of openings and finishings products, by Studco Building Systems, produce minimalistic flush finishes to eliminate trims, baseboards and traditional timber systems for commercial, residential and industrial interiors.

J EzyJamb

The Flush Flnish Frameless Steel Door Jamb System

EzyJamb[®] flush finish door jamb systems create seamless clean lines and eliminates the need for trims around the door frame.

Providing a modern and defining feature to your project; EzyJamb[®] conceals the door frame and creates square set interiors, as the unique frameless jamb system wraps the drywall during framing and blends seamlessly with the wall.

EzyJamb[®] is available in a range of single or double jamb profiles.



Classic Adjust (EZC)



Inswing Door (ISD)





Î

Single Rabbet Door Frame (SRC)



Double Rabbet Door (DRC)

Classic Adjust (EZC)

Inswing Door (ISD)



Cavkit turns a traditional pocket door into a seamless flush finish door



Transform standard pocket doors into trim-free pocket doors with CavKit; a flush finish system that trims and caps the drywall edges around the door penetration to create a pocket door that can be hidden when open and provide privacy when closed.



The flush finish pocket door solution



Create fluidity between rooms with SlideSet; the flush finish pocket door system that gives the ability to completely conceal the door and give the impression that the door does not exist when open and complete privacy when closed when utilising our flush jamb system.








Rocyork concealed door hinges offer an architectural allow uninterrupted clean lines around internal doors for the ultimate square-set interior. Featuring a fully adjustable patented 3D alignment system, the invisible hinges come with a super strong rating up to suit your door capacity.

ACOUSTICAL CEILING ACCESSORIES

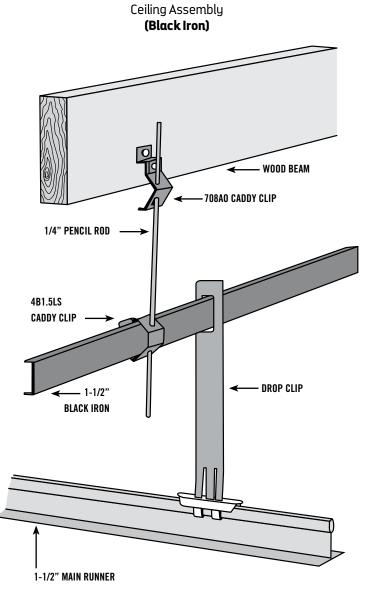



1/8" POPLAR 3/8" WIGGLE LAUAN



BENDING 8' X 4' COUNTER 4' HIGH TUBE



BENDING 4' X 8' COLUMN 8' HIGH TUBE

NOTES	

NOTES

NOTES



PROUDLY SELLS













































SIMPSON Strong-Tie

















NEWARK, NEW JERSEY

WEST 47TH ST, NEW YORK, NY 618 W 47th St,

8 Avenue A, Newark, NJ 07114 (973) 718-7790

New York, NY 10036 (212) 777-1150

LET'S DO IT – LIC

51-15 35th St, Long Island City, NY 11101

212-255-2522



WEST 18[™] ST, NEW YORK, NY

436 W 18th St, New York, NY 10011

(212) 924-3262

SERVING THE 5 BOROUGHS SINCE 1923

Materials Cut to Size Fast, Same Day Delivery Available Pick-Up Orders Loaded Promptly

PRINCELUMBER.COM